
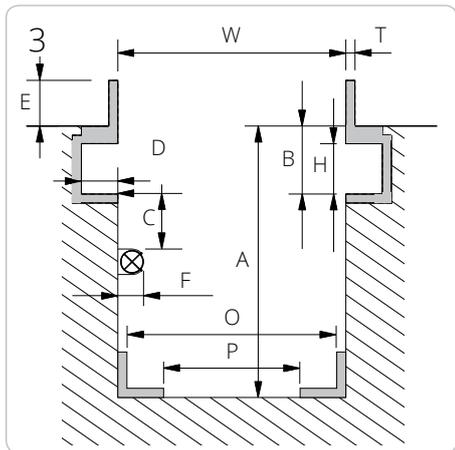
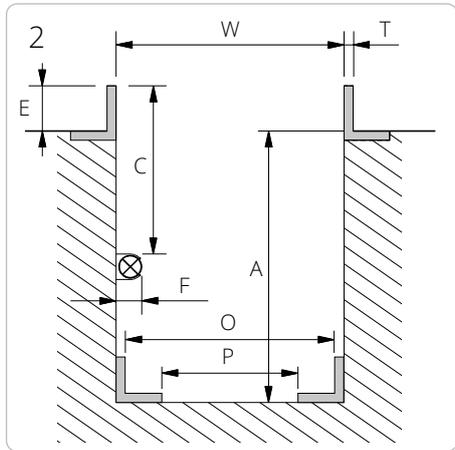


PIT SPECIFICATION FORM

GD	- Pit jack single ram	10 t	15 t	20 t	FL	- Heavy duty jacking beam	6 t	12 t	16 t	20 t
GD	- Pit jack twin ram	10 t	15 t	20 t	SD	- Jacking beam	2 t	2,6 t	3,2 t	4 t
GDT	- Telescopic pit jack	15 t			ABT	- Support bridge	15 t			
GGD	- Floor pit jack	15 t			AB	- Support bridge	20 t			

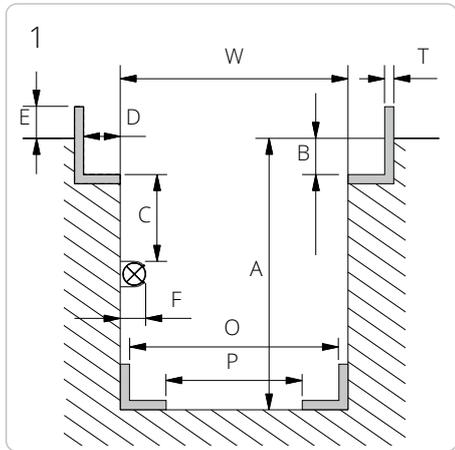

4 Drawing

Drawing no.: _____

Please measure various places along the length of the pit. Max 12 mm variation between W min and W max. throughout the pit length

W min. = _____ mm

W max. = _____ mm

A min. = _____ mm

B = _____ mm

D = _____ mm

E = _____ mm

H = _____ mm

T = _____ mm

If the pit is mounted with light or other obstructing parts, please fill out C and F:

C min. = _____ mm

F max. = _____ mm

GGD150S - Floor pit jack

O min. = _____ mm

O max. = _____ mm

P min. = _____ mm

P max. = _____ mm

Placing of saddle

The placing of top saddle excluding cross beam adaptor, safety stand and extention is required:

above workshop floor _____ mm

levelling with workshop floor

below workshop floor _____ mm

The top of the cylinder will be positioned +/- 50 mm according to requested level

Option

Please note, mounting of different options will increase the min. height:

Cross beam T4-1 = + 100 mm

Cross beam T5-1 = + 95 mm

Cross beam T6-1 = + 55 mm


Cross beam T4-2 = + 145 mm

Cross beam T5-2 = + 140 mm

Cross beam T6-2 = + 90 mm

Safety stands S200 = + 65 mm

AS3 = + 100 mm

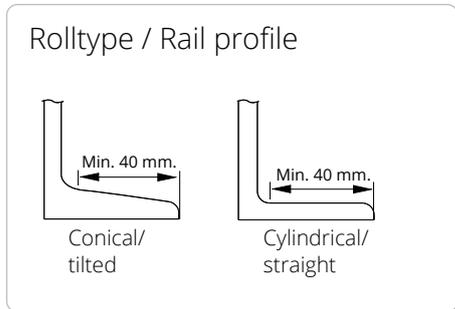

PLEASE NOTE: It is the customer's responsibility that the given measures are correct and sufficient and that the pit is built and anchored to withstand the designated loading.

Date:	Measured by:	Dealer:	Signature:
_____	_____	_____	_____

LIFT SPECIFICATION FORM




Reset

Print

FL - Heavy duty jacking beam 6 t 12 t 16 t 20 t

SD - Jacking beam 2 t 2,6 t 3,2 t 4 t

Lift: _____ Model: _____ Capacity: _____ Year: _____

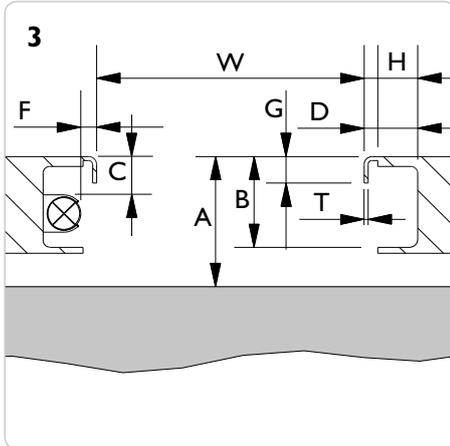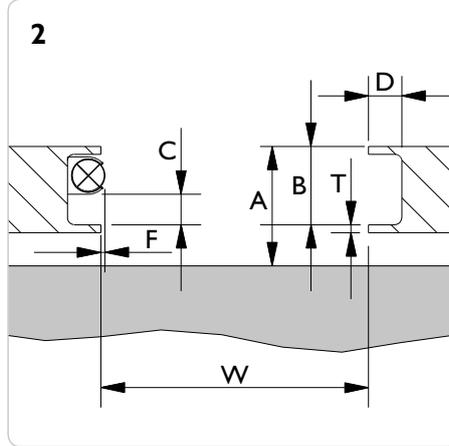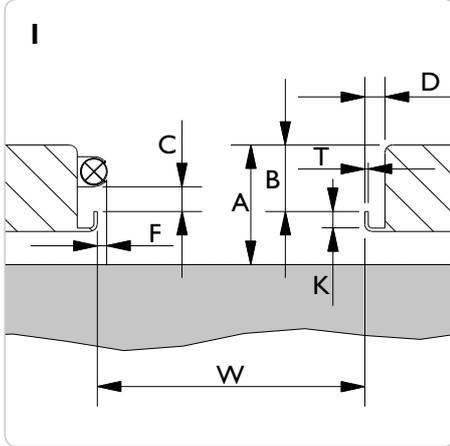

4 Drawing


Drawing no.: _____

- W = _____ mm
- A = _____ mm
- B = _____ mm
- D = _____ mm
- G = _____ mm
- H = _____ mm
- K = _____ mm
- T = _____ mm

If the lift is mounted with light or other obstructing parts, please fill in C and F:

- C min. = _____ mm
- F max. = _____ mm

Rail profile

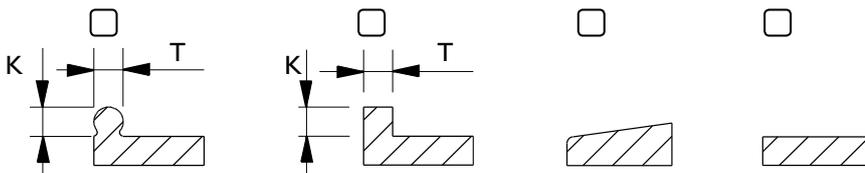

PLEASE NOTE: It is the customer's responsibility that the given measures are correct and sufficient. The lift shall always be approved by the lift manufacturer for mounting of jacking beams. **N.b. EN1493:1998 the capacity of the jacking beam cannot exceed 0,66 x the capacity of the lift.** (A 2 t jacking beam on a 3 t lift is okay - but not a 2,6 t).

Date: _____ Measured by: _____ Dealer: _____ Signature: _____